


F I X E D R E S I L I E N T

SYSTEM FEATURES AND BENEFITS

A floating sports floor system providing excellent stability and shock absorption with uniform high ball rebound, consisting in general of a vapor barrier, resilient Rezill pads, steel channel encased base and flex sleepers, plywood subfloor, maple flooring, sanding, sealers, finishes, game lines and wall base.

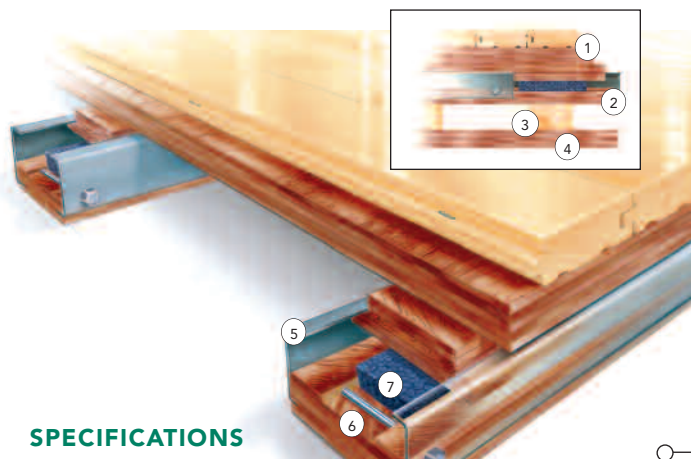

- ① Upper Flex Sleeper
- ② Lower Base Sleeper
- ③ Optional added profile block for height adjustment
- ④ Optional added support plate
- ⑤ Heavy Duty, buckle resistant steel channel provides great resistance to upward pressure
- ⑥ Protective Resilient Pad Encasement Slot
- ⑦ Rezill Pad

SPECIFICATIONS

MANUFACTURING

ISO9001:2000
CERTIFIED

U.S. PATENT

5,778,621

SYSTEM TYPE

Floating Resilient
Fixed Resilient Option

ANCHORAGE

Continuous Channel
(Design Group 1)

SUBFLOOR CONSTRUCTION

Sleeper and Plywood

RESILIENCE

Rezill Pads

RECYCLED CONTRIBUTION



PermaFlex subfloor system includes components with recycled content

SLAB DEPRESSION

15/32" (12 mm) plywood:
25/32" (20 mm) flooring – 3" (76 mm)
33/32" (26 mm) flooring – 3 1/4" (83 mm)

23/32" (18 mm) plywood:
25/32" (20 mm) flooring – 3 1/4" (83 mm)
33/32" (26 mm) flooring – 3 1/2" (89 mm)

DIN STATUS



D·I·N

Meets or exceeds all the requirements of DIN 18032, Part2

TESTING LABORATORY



United States Sports Surfacing Laboratory

CERTIFIED TESTING




Laboratory test equipment calibrated and certified through the ISSS

GREEN STATUS




Managed forests, certification available

WALL BASE DETAIL

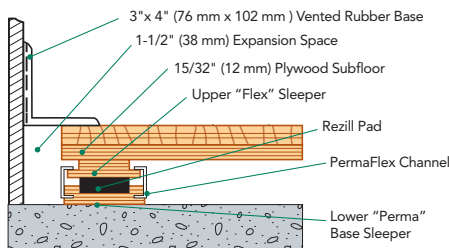

THRESHOLD DETAIL (optional accessory)

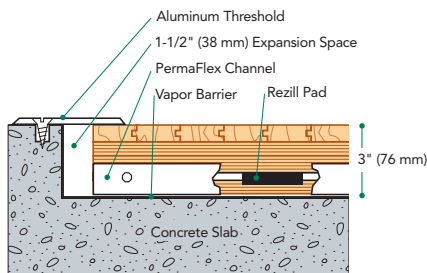

EQUIPMENT DETAIL (optional accessory)

